



TECHNICAL DATA

MASSES

Operating mass	740 kg
Basic mass	710 kg
Axle load, avg.	370 kg

COMPACTION

Amplitude	0.50/0.25 mm
Centrifugal force	25/13 kN
Vibration frequency	63/63 Hz

TRACTION

Speed 1, forward	5.90 km/h
Speed 2, forward	2.50 km/hr
Max. gradeability without vibr.	40 %
Max. gradeability with vibr.	35 %

ENGINE

Manufacturer/Model	Kohler KD15-440
Number of cylinders	1
Fuel tank capacity	4.3 l
Fuel consumption l /h, avg	1.6 l
Emissions according to	StageV
Power	6.3 kW @ 3000 rpm
Type	Air cooled,diesel
Water tank capacity	60 l

HYDRAULIC SYSTEM



Driving	Hydrostatic
Vibration	Hydrostatic
Service brake	Hydrostatic
Parking brake	Hydromechanical front +rear

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



DIMENSIONS

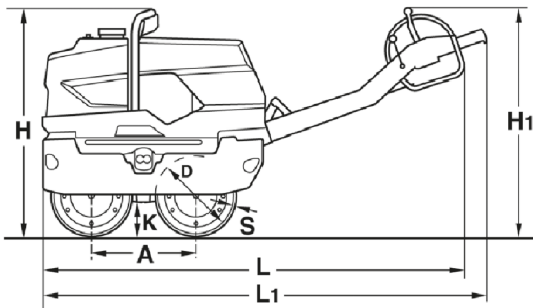

DIMENSIONS

A. Wheelbase	500mm
B. Width	720mm
C. Clearance	210mm
D. Drum diameter	400mm
H. Height	1100mm
H1. Height	1700mm
K. Ground clearance	155mm
L. Length	2030mm
L1. Length	2130mm
O. Overhang	35mm
S. Drum shell thickness	8mm
W. Drum width	650mm

STANDARD FEATURES

- Dual amplitude
- Vibration and throttle regulation on the steering rod
- Infinitely variable speed control
- Hydrostatic vibration drive
- Hydrostatic travel drive
- Safety control including automatic parking brake
- Height adjustable and low vibration steering rod
- Back-up drive protection on the steering rod
- Water sprinkler system, adjustable
- Two scrapers for each drum
- Warning signal at low oil level
- Electric and recoil starter
- Hour meter
- One point lift

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.